

**For sliding gates weighing up to 400 kg.**

**Gear motor characteristics:**


- **practical:** built-in control unit, can be connected by means of a simple connector and can be housed directly inside the motor; incorporated radio card, compatible with the Nice Flo and Smilo systems: 150 transmitters can be entered!
- **advanced:** the speed, strength and pause can all be adjusted

- **intelligent:** thanks to the obstacle detection system and automatic programming of the working times. Self-diagnosis by means of a flashing light
- **safe:** acceleration and deceleration can be adjusted at the beginning and end of each opening and closing manoeuvre

**The kit contains:**

**RD400**

1 irreversible electromechanical gear motor, 24 Vdc, with incorporated control unit and receiver

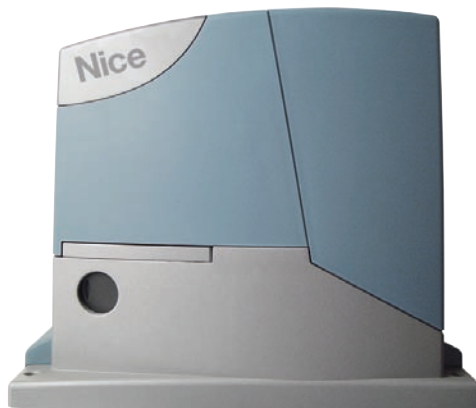

**FLO2R-S**

2 transmitters  
433.92 MHz,  
2 channels


Code	Description	Pc./pallet
<b>RD400KCE</b>	Kit for the automation of sliding gates up to 400 kg.	

*N.B. The content of the package may vary; consult the retailer*

Technical specifications		<b>RD400</b>
<b>Electrical specifications</b>		
Power	(Vac 50 Hz)	230
Current absorbed (line)	(A)	1.1
Power absorbed	(W)	210
Incorporated capacitor	(µF)	-
<b>Performance</b>		
Speed	(m/s)	0.25
Torque	(N)	400
Work cycle	(cycles/hour)	20
<b>Dimensions</b>		
Working temp.	(C°)	-20 ÷ +50
Protection level	(IP)	44
Dimensions	(mm)	330x195x277
Weight	(kg)	8

*For updated and complete information, consult the product technical manual.*

# Nice Road400Kit

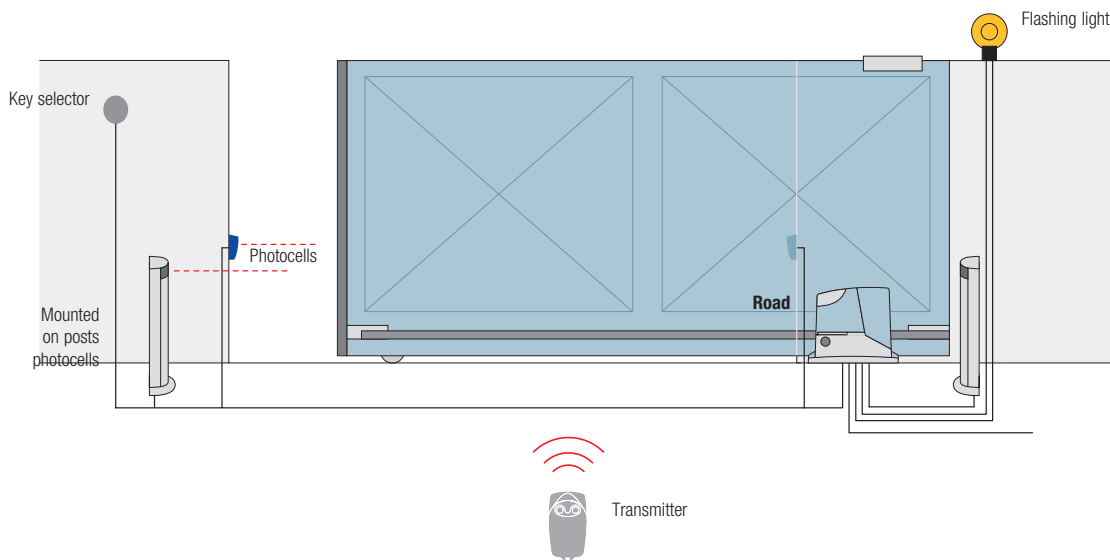

## Accessories



**RBA4**  
spare control unit  
for RD400KCE



**CM-B**  
lock with two metal keys  
compatible with SELE



**ROA6**  
M4 25x20x1000 mm slotted  
nylon rack with metal insert for  
gates weighing up to 500Kg  
  
Pc/Pack. 10



**ROA7**  
M4 rack, zinc coated,  
22x22x1000 mm  
  
Pc/Pack. 10



**ROA8**  
M4 rack, 30x8x1000 mm,  
zinc coated with spacers  
and screws  
  
Pc/Pack. 10

